

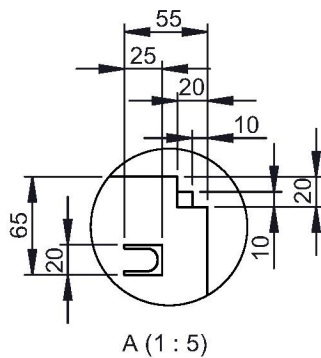


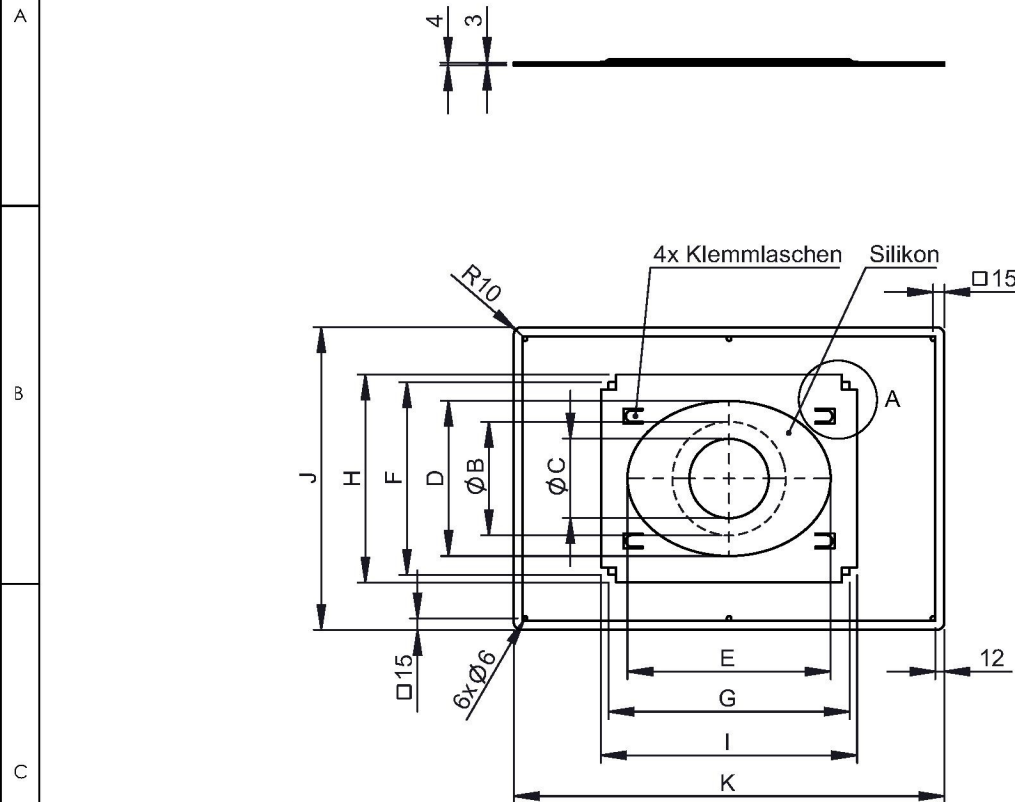

WGR	MAT
2B2	1.4301(304)-2B(IIIC)
2R2	1.4301(304)-2R(IIID)
2B4	1.4404(316L)-2B(IIIC)
2R4	1.4404(316L)-2R(IIID)
2R7	1.4509(441)-2R(IIID)

M 1:15 (Ø150)



Ø	180	195	200	210	215	225	230	245
B	180	195	200	210	215	225	230	245
C	135	150	155	165	170	180	185	200
D	235	250	255	265	270	280	285	300
E	299	314	319	329	334	344	349	364
F	285	300	305	315	320	330	335	350
G	349	364	369	379	384	394	399	414
H	305	320	325	335	340	350	355	370
I	369	384	389	399	404	414	419	434
J	400				450			
K	570				680			
kg	2,08			2,07	2,7	2,69	2,67	

notes:

DIN ISO 13920 Tolerances B

revisions-no.

A1

mm / kg

date name

drawn by 29.03.2021 JLA

checked by

approved by

modified by

description

Deckenblende 21°-40° mit
Abdichtung für Dampfsperre (bis
450°/N1)

code

WGR-ZUAC1703

drawing-no.

01-07-04-5503-000

scale

1:10

format

A4

sheet

1 of 2

