


SPEEDY
Slatted Cover
Speedy fabrication required (p. 484):

☐ Yes ☐ No

FROM NOVEMBER TO MARCH

APRIL

FROM MAY TO AUGUST

SEPTEMBER, OCTOBER

D+5
D+6
D+7
D+6

Customer N°: Customer reference: Order form date:

Company contact details:

Surname:

Postcode: Town/City: Country:

Phone:

E-mail:

Contact in case of missing measurements:

.....

.....

Delivery address:

Name:

Address:

Postcode: Town/City: Country:

 Access: ☐ Semi-trailer ☐ Carrier Other:

Fill in the truck access checking guide on p. 367.

☐ Pick up at DEL Brécé factory (35530 Brécé, FRANCE)

☐ New build pool ☐ Existing pool: In order to avoid taking again measurements of the pool, please indicate the invoice number, order number or reference of the original cover made:

VERSIONS
☐ Electric ☐ Solar

END-STAND COLOUR
☐ Ice white ☐ Champagne grey ☐ RAL on request:

DISK COLOUR
☐ Blue ☐ Aniseed green ☐ Black ☐ White ☐ Concrete grey ☐ Wood

☐ Champagne grey ☐ RAL on request:

 RAL on request: standard
lead time + 3 weeks

CONTROLS
☐ Wi-Key ☐ Key switch

CLOSING CONTROLS
☐ Maintain contact (default choice) ☐ Impulse on

OPTIONS
"Stop salt" control box (only for the electric version) ☐ Yes ☐ No

Automatic stop ☐ Yes ☐ No

Wall mounting ☐ Yes ☐ No

Extra Wi-Key emitter ☐ Yes ☐ No

If so, indicate the quantity (max. 3):

SLATS
Opaque PVC 69 slats
☐ White ☐ Beige ☐ Grey ☐ Blue*

Solar polycarbonate slats
☐ Crystal black ☐ Silver ☐ Crystal blue* ☐ Crystal* ☐ Crystal brown* ☐ Crystal green*

(Polycarbonate slats are not compatible with bromine treatments)

☐ Leave one slat out of three without endcap to ease the sliding of the slats: ☐ AD Side ☐ BC side

By default all the endcaps will be fitted.

*Additional lead time.

STAIRS OR SLAT CUT-OUT
☐ Roman stair ☐ Square stair ☐ Trapezoid stair ☐ Slat cut-out

LOCKING KITS
☐ **Pushlock**
☐ White ☐ Beige ☐ Grey ☐ Dark grey ☐ Blue ☐ Argile green

☐ **Quicklock + Tool**
☐ White ☐ Beige ☐ Grey

☐ **White straplock kit**
☐ Concrete coping anchors ☐ Wood coping anchors

Fittings:
☐ Insert mount

☐ Surface mount

☐ Hanging mount

☐ High hanging mount (Pushlock only)

WINTER SHIFT / PROTECTIVE COVERING
Ivernea: ☐ Yes ☐ No Fill in the order form on p. 399.

Ivernea plus: ☐ Yes ☐ No Fill in the order form on p. 399.

Customer N°:	Customer reference:	Order form date:	Company:
--------------	---------------------	------------------	----------

POOL TYPE	
<input type="checkbox"/> Polyester shell - Brand: - Model: <input type="checkbox"/> Concrete <input type="checkbox"/> Resin <input type="checkbox"/> Wood <input type="checkbox"/> Polystyrene block <input type="checkbox"/> Metal	
WATERTIGHTNESS	
<input type="checkbox"/> Liner <input type="checkbox"/> On-site lining <input type="checkbox"/> Tiles <input type="checkbox"/> Coated <input type="checkbox"/> Other:	
POOL	
Diagonals Diagonal AC =cm Diagonal BD =cm	
Overflow <input type="checkbox"/> Yes (by default 1 every 4 m on each length) on <input type="radio"/> AB <input type="radio"/> BC <input type="radio"/> CD <input type="radio"/> AD <input type="checkbox"/> No <input type="radio"/> Infinity control box (we recommend the Pushlock hanging mount kits)	
INFO For an overflow pool, the hanging mount kits will be delivered in raw stainless-steel.	
Coping thickness cm	

skimmer : Indicate the exact skimmer positions.

locking kit : Indicate the positions of the locking kits that have already been installed.

To comply with the French NF P 90-308 safety standard, the locking kits must be installed in accordance with our recommendations in the technical instructions leaflet. The positioning of the locking kits will be determined by CF Group according to the configuration of your pool. A detailed plan will be sent to you when your cover is delivered.

ADDITIONAL INDICATIONS IF REQUIRED

DISTANCE BETWEEN END-STANDS	
Pool width	Max. distance between end-stands
3 m	3.35 m
3.50 m	3.85 m
4 m	4.35 m
4.50 m	4.85 m
5 m	5.35 m

INTERIOR POOL DIMENSIONS TO BE TAKEN AT THE WATER LINE AFTER WATERTIGHTNESS HAS BEEN MADE



Skimmer thickness

☐ Flush ☐ Proud of cm


Skimmers on the widths indicate them on the drawing

Skimmers on the lengths: ☐ BC ☐ AD

Stairs (see p. 364).

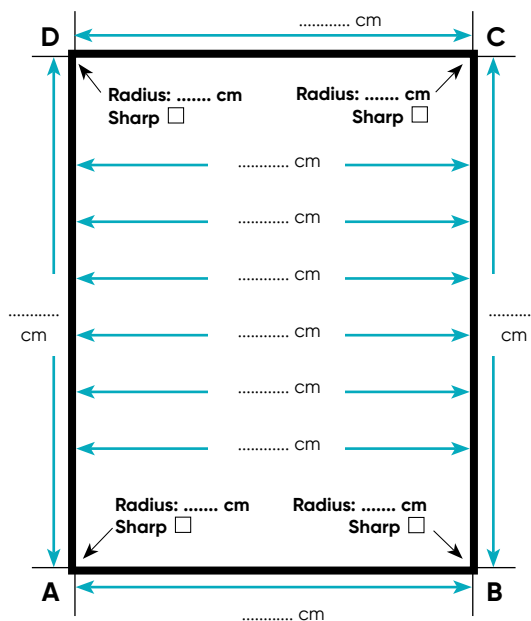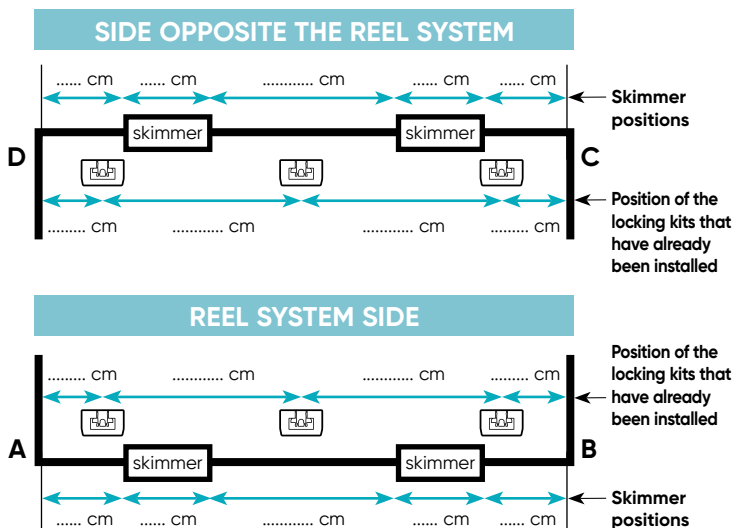

TUBE / REEL SYSTEM SIDE = AB

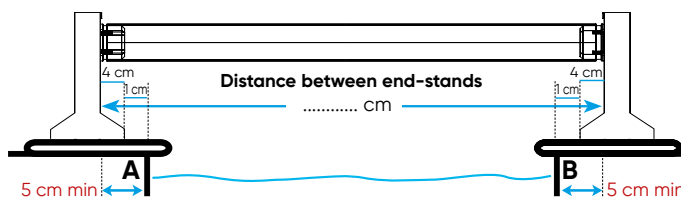

Min. distance between end-stands = pool width [AB] + 10 cm

DRAWING FOR STAIR SLATTED COVER


Customer N°:	Customer reference:	Order form date:	Company:
--------------	---------------------	------------------	----------

: Indicate the exact skimmer positions


: Indicate the position of the locking kits that have already been installed

ROMAN STAIR


We recommend the use of the measurement-taking order triangulation for.
See order form on p. 97.

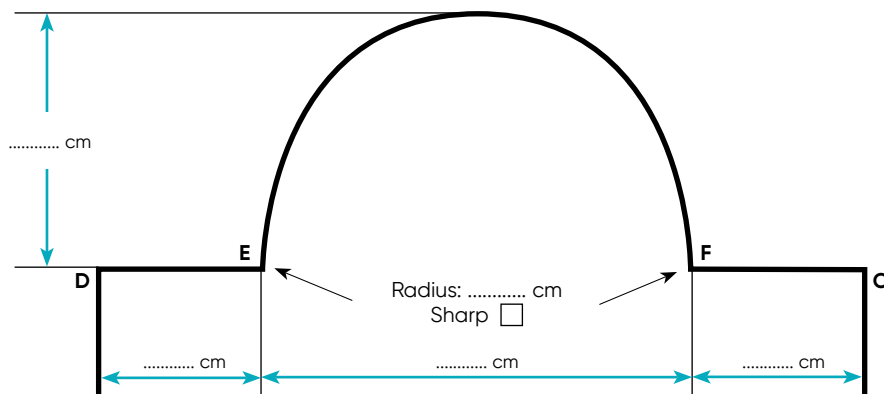

SQUARE STAIR

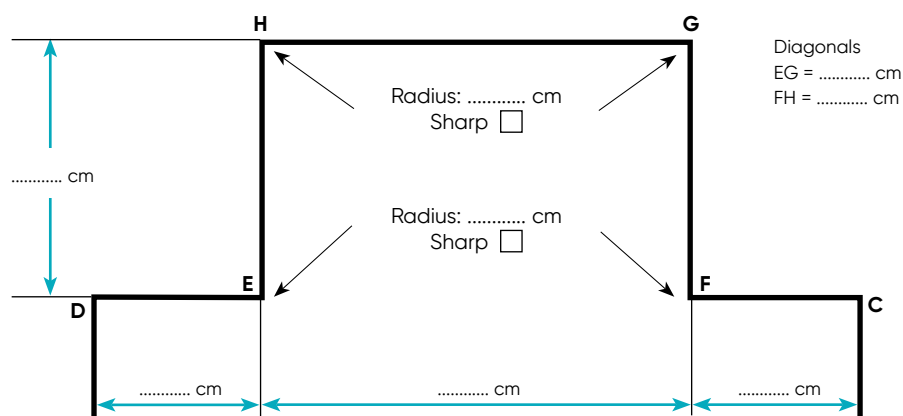

TRAPEZOID STAIR

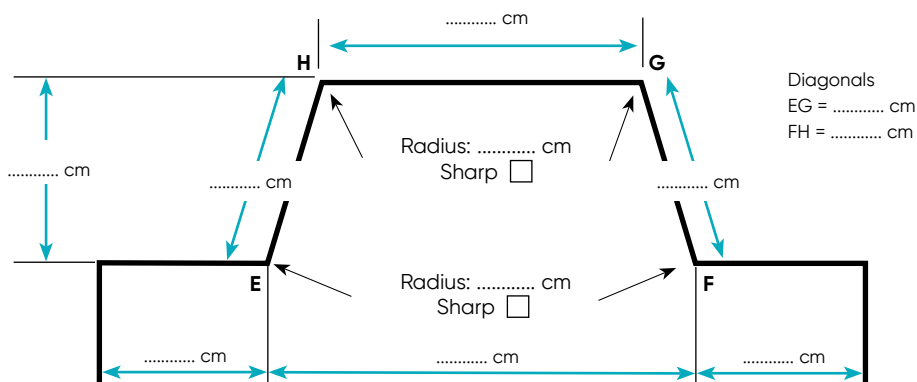

SLATTED COVER TRIANGULATION DRAWING

Customer N°:	Customer reference:	Order form date:	Company:
--------------	---------------------	------------------	----------

CD =cm

EF =cm

CF =cm

ED =cm

EP =cm

E1 =cm

E2 =cm

E3 =cm

E4 =cm

E5 =cm

E6 =cm

E7 =cm

F1 =cm

F2 =cm

F3 =cm

F4 =cm

F5 =cm

F6 =cm


F7 =cm

Corner radius C =cm

Corner radius D =cm

Corner radius E =cm

Corner radius F =cm

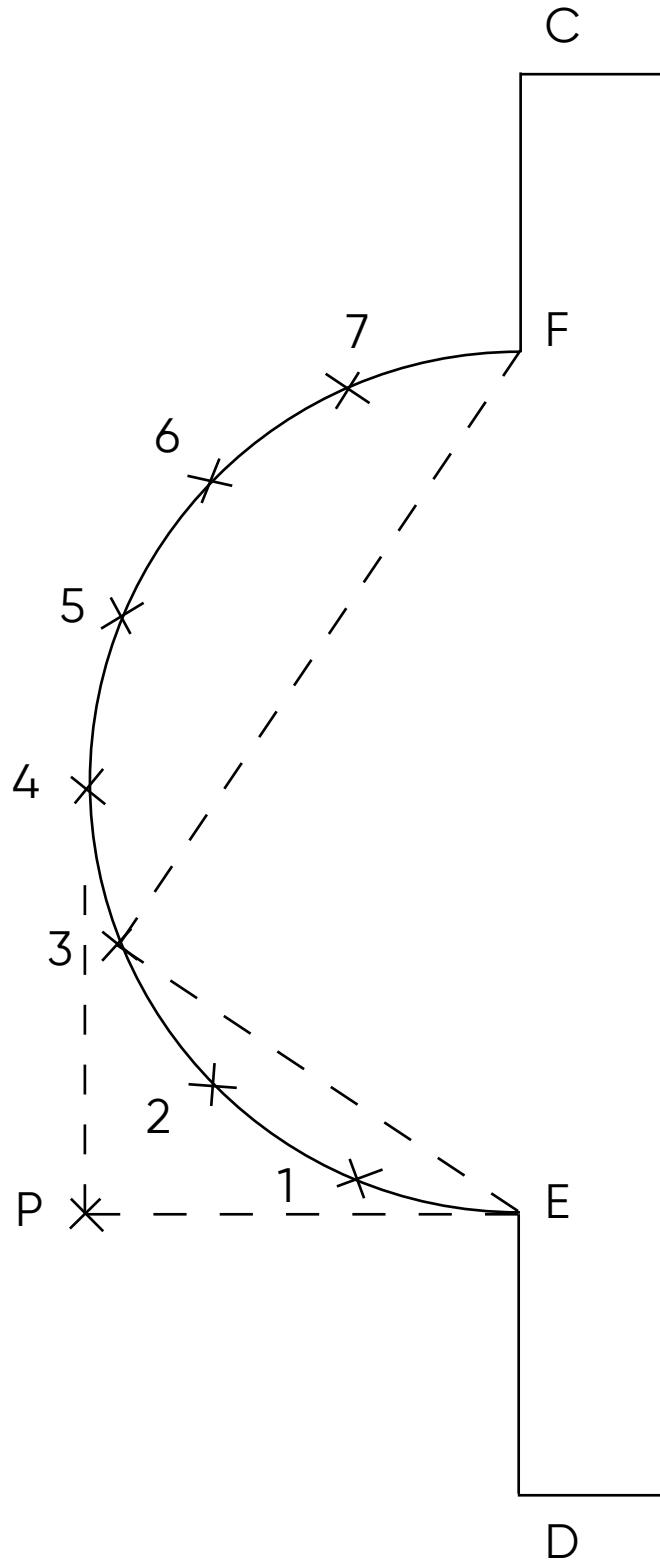

TRUCK ACCESS CHECKING GUIDE

Company name:

Customer reference:

INFO

To allow us to deliver to you with maximum efficiency, please fill in this questionnaire carefully. We decline all liability in the event of the required delivery location being inaccessible due to the indications you have provided. Any new deliveries will be invoiced to you. Thank you for your understanding.



ORDERED EQUIPMENT

☐ Automatic slatted cover ☐ Bar cover ☐ Summer cover (over 4.50 m) ☐ Pool kits solutions/above-ground pools

ROAD SIGNAGE LEADING TO THE REQUESTED DELIVERY POINT



3.5 T

Have you already seen this type of road sign on the road that leads to the requested delivery point?

☐ Yes If so, please indicate which ones:
☐ No

ACCESS TO THE REQUESTED DELIVERY POINT: TYPES OF VEHICLE LIKELY TO HAVE ACCESS

Below are different vehicle types. Indicate which types are likely to be able to pass in front of the requested delivery location.



Tractor + trailer (38 tonnes):

☐ Yes ☐ No



Semi-trailer (38 tonnes):

☐ Yes ☐ No



Small carrier (19 tonnes):

☐ Yes ☐ No



Small truck (6 tonnes):

☐ Yes ☐ No



Garbage trucks:

☐ Yes ☐ No



Concrete mixer trucks:

☐ Yes ☐ No



Fuel delivery trucks:

☐ Yes ☐ No





Small van:

☐ Yes ☐ No

TRUCK CLEARANCES: DETAILS

Be careful of the truck clearance: Is the delivery address subject to one of the below situations ?

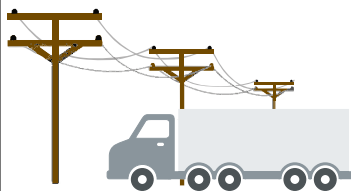Electric cables: ☐ Yes ☐ NoLow branches: ☐ Yes ☐ NoCorners of roads: ☐ Yes ☐ No

OTHER INDICATIONS, PLEASE DESCRIBE

IVERNEA / IVERNEA PLUS WINTER/PROTECTION COVER

Customer N°:	Customer reference:	Order form date:
--------------------	---------------------------	------------------------

Company contact details: Surname: Postcode: Town/City: Country: Phone: E-mail: Contact in case of missing measurements:	Delivery address: Name: Address: Postcode: Town/City: Country: Phone (person to contact) <input type="checkbox"/> Pick up at DEL Brécé factory (35530 Brécé, FRANCE)
---	--

☐ New pool ☐ Existing pool: to avoid re-taking the measurements, please indicate the invoice n°, order n° or delivery document n° for the original cover:

Caution, Ivernea and Ivernea covers are not compatible with a solar PVC slat cover.

SLATS

☐ In-ground (decking above water) ☐ In-ground (decking under water) ☐ Above-ground (without covering) ☐ Above-ground (with covering)

MODEL / COLOUR**Ivernea:**

☐ Green ☐ Blue ☐ Beige ☐ Grey

Ivernea plus:

☐ Ivernea Plus

POOL DIMENSIONS

(for in-ground covers, indicate the size excluding the pit)

Length: cm

Width: cm

Diagonals

Diagonal AC = cm

Diagonal BD = cm

Diagonals taken at sharp corners.

**CORNER RADIUS**

A = cm

B = cm

C = cm

D = cm

STAIRS

☐ Yes ☐ No

SHAPE:

☐ Square ☐ Roman

Indicate the stair position:

☐ On the AB width ☐ On the CD width

☐ Along the AD length ☐ Along the BC length

FILTRATION BLOCK / CUT

☐ Yes (supply a drawing) ☐ No

FITTINGS

Bungee-clip

OPTION

☐ Extra Bungee-clip(s):
recommended for windy areas.

