



Strong contacts. Clever technology.

## Technical Data Sheet

### Connection section no. 115, 40 mm

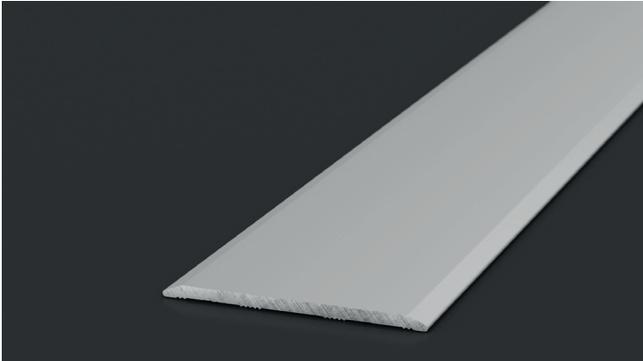

Connection sections create transitions between almost any level of flooring.

The profiles are available in a wide range of shapes, materials and colors and can be laid quickly and easily.

- > Aluminium.
- > Auto-adhesive.

Material:	EN AW 6063	DIN EN 573
Material condition:	T6	DIN EN 755-2
Pre-treatment:	E6	DIN EN 17 611
Anodised layer thickness:	Class 15	DIN EN 17 611

Adhesive  
 hotmelt adhesive (synthetic rubber-based)  
 Viscosity: 10.000 +/- 3.000 mPa.s (170°C)  
 (Brookfield RVT DV-II, Sp 27 ASTM D 3236)  
 FDA state: acc. to § 175.105 Adhesives  
 Protection: covered with silicone paper

**Suitable for:**  
 Elastic floor coverings, Textile floor coverings  
**Installation method:**  
 gluing

**Lengths:**  
 270 / 100 cm  
**Colour selection:**  
 gold / silver / stainless steel matt