




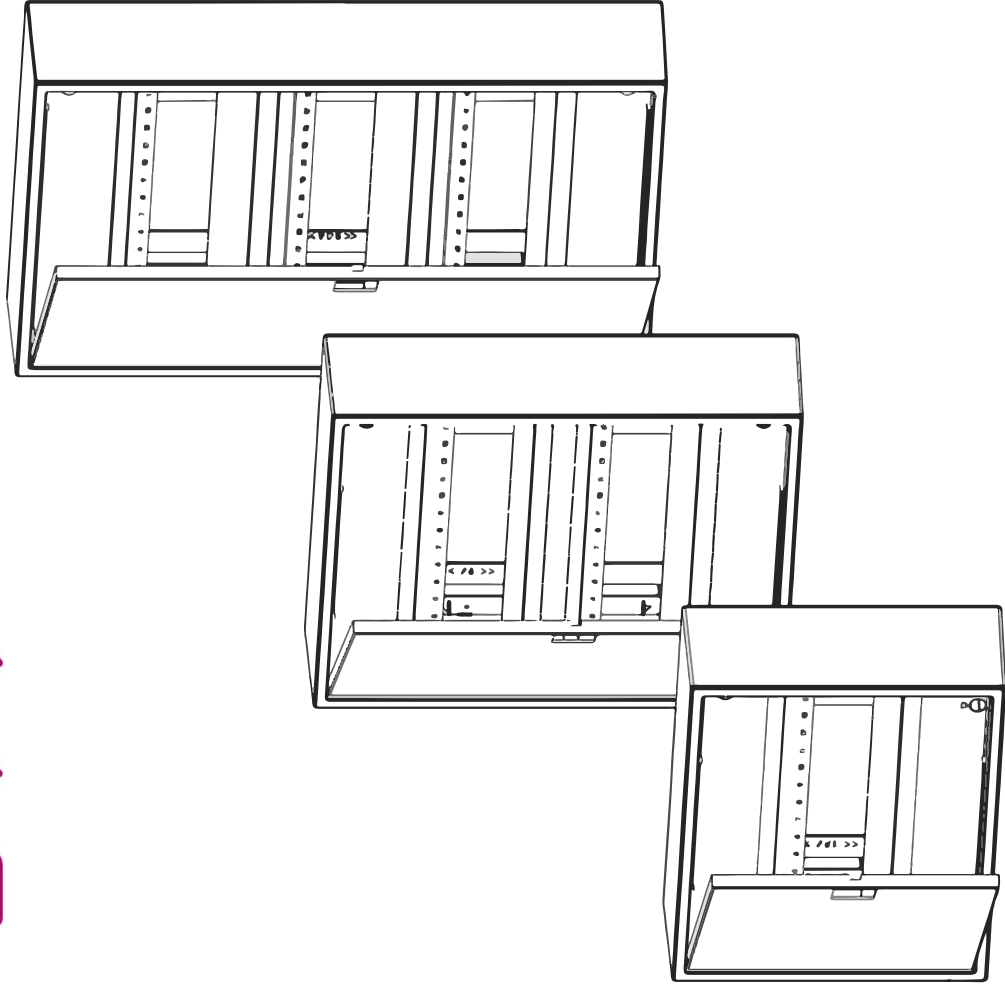

GP

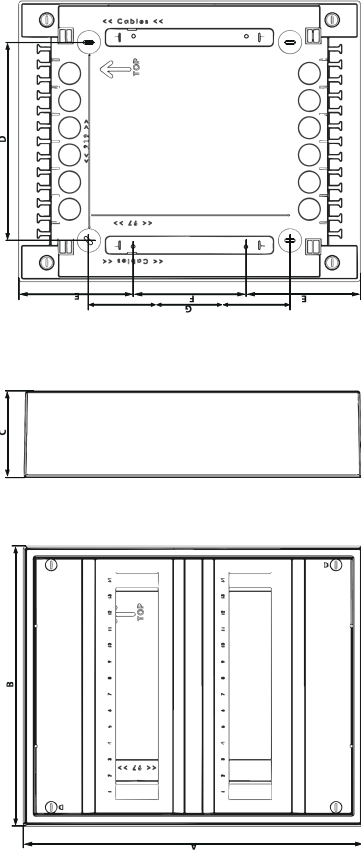

	A	B	C	D	E	F	G	Pde
7012124111598	251 mm	312 mm	97 mm	125 mm	126 mm	125 mm	126 mm	30W
7012244111598	376 mm	312 mm	97 mm	223 mm	126 mm	125 mm	126 mm	40W
7012364111598	501 mm	312 mm	97 mm	125 mm	126 mm	125 mm	126 mm	50W

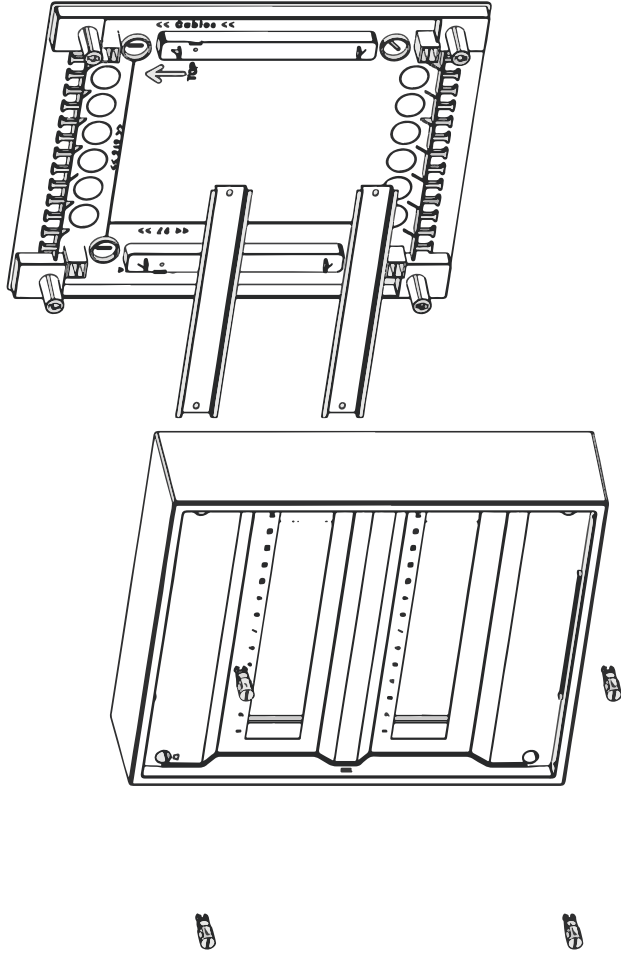

Temperature range: -25°C.....+60°C.Rating voltage AC400V.According to: IEC60670.IK07

